




CONDENSED CATALOG

Ground Support Test Equipment

Distribution

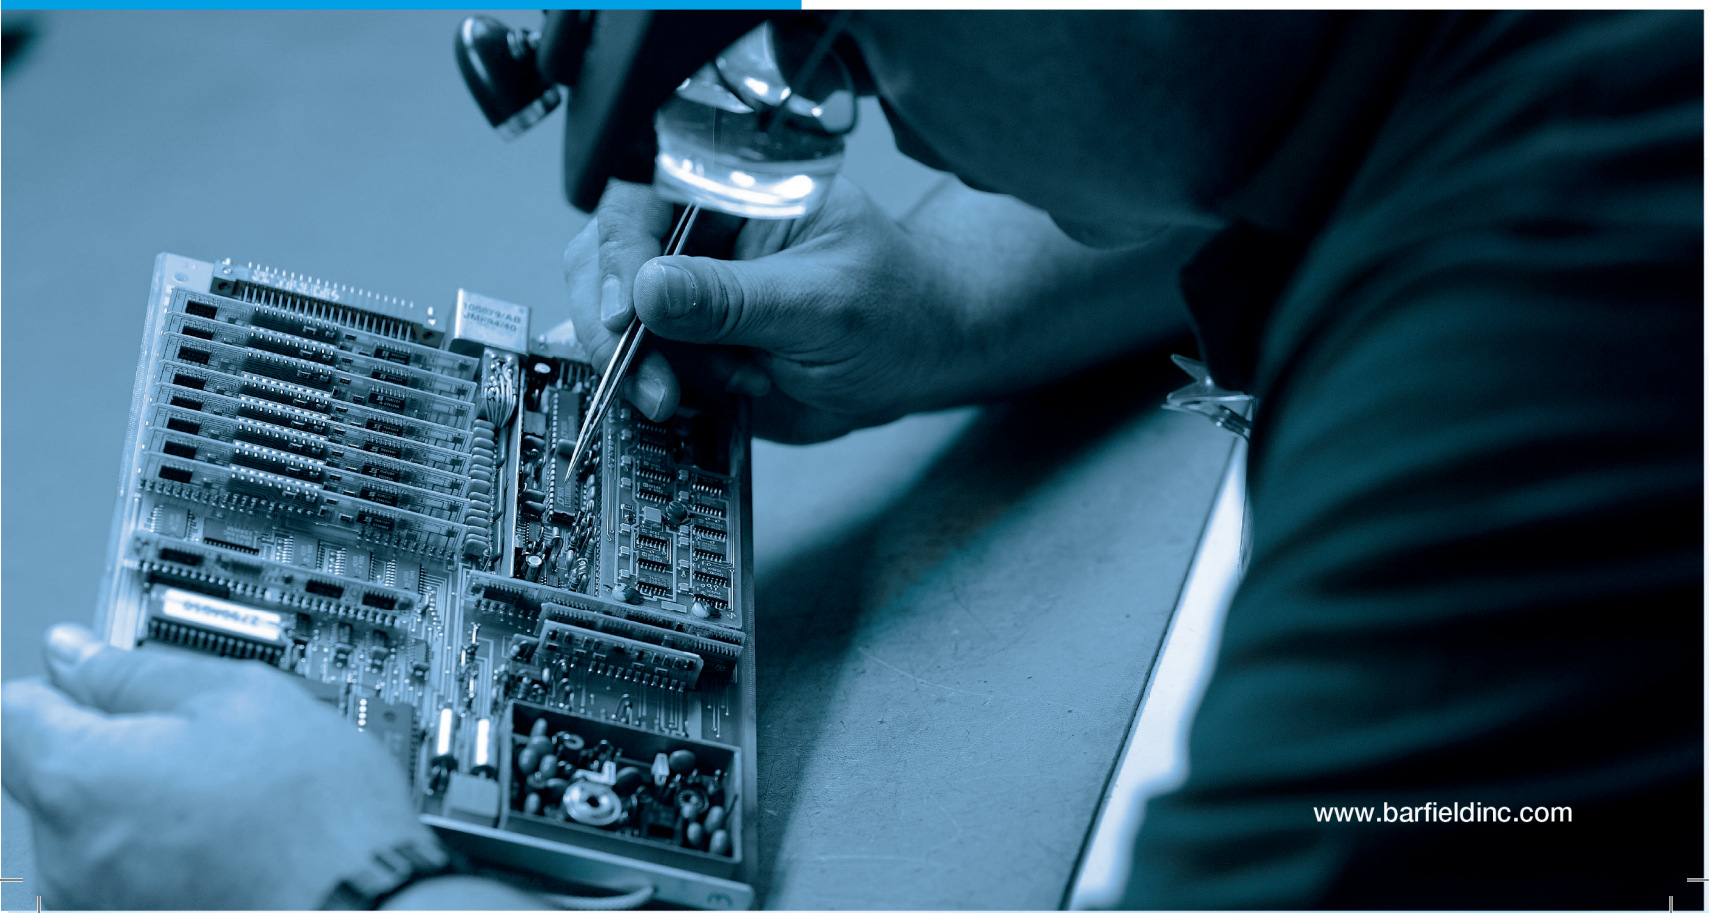



1811D Pitot static

- > Ideal for flightline calibration checks and troubleshooting
- > Performs precision Pitot-Static leak tests
- > Two-instrument combination with optional ranges
- > Correction cards for all analog instruments
- > Fully portable and self-contained
(No electric or external pressure sources needed)
- > Lightweight plastic case for portability



1811GA-1811HA Pitot static

- > Compact fiberglass case allows unit to fit in tight quarters
- > Performs on board instrument calibration checks
- > Performs precision Pitot-Static leak tests
- > Three-instrument capability for analog units with optional ranges
- > Correction cards for all analog instruments
- > Operates from 115/230 VAC 50-400 Hz (1811HA)
- > Fully portable, self-contained
(No electric or external pressure sources required)
- > Vacuum & pressure hand pumps installed on both models (1811GA & 1811HA)

DPS350

- > Transducer Technology provides the highest accuracy and best long-term stability available for line maintenance equipment
- > Menu-driven operator interface provides protection of instruments under test with programmable limits on the following parameters:
 - Altitude (feet or meters)
 - Airspeed (knots or km/hr)
 - Rate of Climb (ft/min or m/min)
 - Mach (mach)
- > Leak testing mode displays leak rates in ft/min, knots/min and metric equivalent units
- > Meets .0030 inHg accuracy on static channel





DPS450

- > Fully automated unit
- > Optional handheld remote control
- > Database capable of saving the limit data of different aircraft and stored in a battery backed memory
- > GO TO GROUND feature automatically and safely depressurizes both systems to ambient pressure
- > Compact and lightweight for quick and easy portability
- > Meets .0030 inHg accuracy on static channel



DPS500

- > Fully automated unit
- > Handheld remote control
- > Database capable of saving the limit data of up to thirty different aircraft and stored in a battery backed memory
- > GO TO GROUND feature automatically and safely depressurizes both systems to ambient pressure
- > Compatible with any Centronics standard parallel interface printer of 80 or 132-column width
- > PC programmable via RS 232 using optional Test Program Manager (TPM) software kit
- > Available with an IEEE 488 Connector
- > Meets .0030 inHg accuracy on static channel




ADTS 206

- > Three independent pressure control channels for altitude, air speed and angle of attack
- > High accuracy resonant silicon sensors on all channels
- > Internal pressure and vacuum generation, high pump reliability
- > GO TO GROUND feature automatically and safely depressurizes both systems to ambient pressure
- > Manual or stored test sequence operation
- > RS232 port for PC control or test data transfer
- > Limits protection for aircraft instruments
- > Compact and lightweight for quick and easy portability
- > Meets .0030 inHg accuracy on static channel



Inquire about new products not displayed in this catalog

see p.5 for details on pitot & static adapters

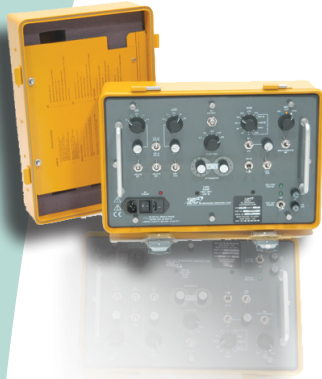

T-30D VOR/ILS/MB Ramp Test Set

- > Permits ICAO Annex 10 CAT III ILS ramp check certification
- > Checks VOR, GS, LOC, MB, Flight Director & Autopilot
- > Dual VOR/LOC/GS frequencies
- > Separate and simultaneous MB/ILS
- > Dual extended-range variable ILS
- > Easy one-man operation
- > Fully adjustable functions allowing precise testing and measurements
- > 2-year limited warranty; 5 & 10-year available

T-36C Cat III Nav/Comm Test Set


- > Generates ILS signals to ICAO Annex 10 CAT III precision
- > Checks VOR, GS, LOC, MB, VHF COMM, Flight Director & Autopilot
- > Operates in shop, on ramp and in cockpit
- > Tests antenna-to-antenna or direct connect coax
- > US and European frequencies with 8.33 kHz channels
- > Meets requirements of MIL-PRF-28800F
- > Built-in NICAD battery and charger
- > 2-year limited warranty



TR-220 Multi-Function Test Set

★ ADS-B Compliant

- > ADS-B and TIS Test features
- > Tests transponder (Modes A, C and S)
- > Allows simulation of ATCRBS and Mode S Intruders for TCAS testing
- > Simulates DME distance and velocity
- > Performs transponder tests required by FAR Appendix F Part 43
- > Download test data to PC via an RS-232 interface
- > 2-year limited warranty; 5 & 10-year available

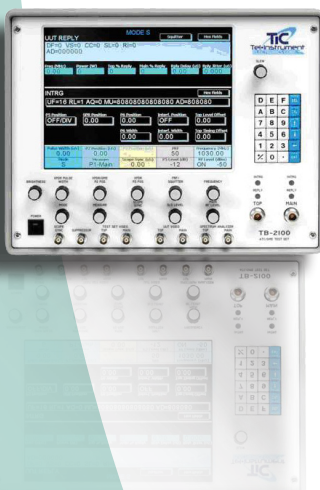

TB-2100 ATC/DME Test Set

★ ADS-B Compliant

- > Two independent, non-coherent RF channels for Mode S testing
- > Tests the latest Mode S Capabilities
 - Automatic Dependent Surveillance Broadcast (ADS-B)
 - Extended Squitter
 - Elementary (ES) and Enhanced Surveillance (EHS)
 - Traffic Information Systems (TIS)
- > Color LCD display features wide viewing angle
- > Touch-sensitive screen allows quick setup of test parameters
- > Easy to navigate menus require minimal training to operate
- > Continuous display of critical measurements including power, pulse parameters, percent reply and frequency
- > 2-year limited warranty

Available for all aircraft and helicopter types


Pre-Test Probes

>> The pre-testers are employed to verify the integrity of the pitot test adapter, hoses and air data test set prior to connection to the aircraft. The probe is inserted into the pitot test adapter while connected to the hose and air data test set. By applying pneumatic pressure, the entire assembly (tester, hoses & adapters) are checked for leakage.



Pitot Test Adapters

>> The pitot test adapter body is of solid uni-body construction. There is no metal to metal contact between pitot tube and test adapters. Seals and spacers inside the adapter body ensure a leak free connection. They are easily exchanged without special tools. Optional high temperature seals and spacers can be installed upon request.

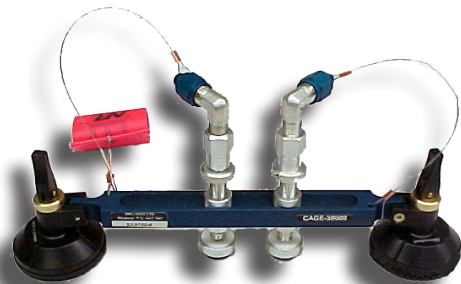

Static Test Adapters

>> Static test adapters provide a connecting seal at the aircraft's static ports. The means of attachment depend on the aircraft type.

Installation and removal of Nav-Aids adapters takes just seconds.



Air Data Accessory Kits

>> Air data accessory kits contain all the required test adapters and hoses to connect the air data test set to the aircraft type for which the kit is designed.

Also included as standard equipment are pre-test adapters, seal kits and lubrication fluid.

Depending on the need, additional equipment such as control consoles and suspension arms are a part of the kit.

RVSM Air data accessory kits are available.



www.bartfieldinc.com



TT1200A Turbine temperature test set

- > Displays the temperature in °F in addition to °C and millivoltage
- > Has a calibrated temperature range of 1372 °C
- > Powered from long lasting C-cell batteries with auto-off feature to conserve batteries
- > True 4-wire resistance measurements
- > Calibration date reminder available from display with user alerts for approaching CAL date
- > Backlit 16-character alphanumeric display with user prompts
- > CE certified
- > Accuracy: Typical measurement error at ambient (25°C) less than $\pm 0.5^{\circ}\text{C}$

Cable Adapter
P/N 101-00932 and 101-00939
For GE Engine CF6-80A, A1 and C2

Cable Adapter
P/N 101-00933
For GE Engine CF6 and CF6-50



P/N 101-00932/933/939

Cable tensiometer

CT12A Cable tensiometer

The CT12A provides accurate readings in pounds over a wide range of cable sizes from 1/16" to 1/4" (US Std). Operating temperatures range from 14°F (-10°C) to 120°F (50°C).



- > Meets new OEM specifications
- > 10-year useful life span
- > Rechargeable battery
- > 4-character digital display
- > Cable gauge included
- > Rugged ergonomic design
- > No conversion table required
- > 1-year calibration cycle
- > High accuracy
- > Simple 3 button operation
- > Higher tension measurements
- > 25 to 1000 pound range (US Standard)
- > Ambient temperature reading
- > Ten (10) minute automatic shutoff feature
- > Available as single cable fixed riser or multi-cable riser
- > Calibration bar included

TT1000A Turbine temperature test set

- > Automatically compensates for ambient temperature at test lead connection junction point or indicates cold junction temperature
- > Thermocouple and lead resistance measurements to 0.01 ohm and insulation measurements up to two (2) megohms
- > Large, 9mm (0.35") high character, 3 1/2-digit liquid crystal display with pre-programmed legends
- > Range: from 0 to 1000° C certified, -60 to 1160° C extended
- > Measures and displays values of CH/AL thermocouple in terms of degrees Celsius (°C) temperature
- > Simulates CH/AL thermocouple with or without simulated system lead resistance
- > Accuracy: Typical measurement error at ambient (25°C) less than $\pm 1^\circ\text{C}$



P/N 101-00902/908

Cable Adapter
P/N 101-00902
For GE Engine CF6-80A, A1 and C2

Cable Adapter
P/N 101-00908
For GE Engine CF6 and CF6-50

Miscellaneous

SC063 Sight compass

- > Calibration device for mounted aircraft compass
- > Rugged, durable and lightweight
- > Accurate to within $\pm 1^\circ$
- > Hand-held and portable
- > 5-foot monopod support included
- > Protective carrying case included



2311FA Pressure tester

- > Manufactured with lightweight aluminum-alloy
- > Field tests aircraft fluid pressure systems
- > Provides for both leak and calibration tests
- > Pressure source for pressure transducers, warning switches & direct reading pressure gauges
- > Applicable for shop or line use
- > No electrical or pneumatic source needed
- > Analog and digital gauges available



2471F Megohmmeter

- > Hand-held, portable, rugged, durable and lightweight
- > Panel switch selector for 100, 200 and 500 volt test potentials
- > Push to test probe button activation
- > Simple forward reading scale
- > Absolutely no shock hazards
- > Sensitive operational amplifier
- > Solid-state circuitry




DC Fuel quantity test set



DC400A Fuel quantity test set

- > Completely self contained DC capacitance fuel quantity test system
- > Capability to bench check aircraft fuel quantity system components
- > Capacitance simulation in the range of 0 to 400 pF with infinite resolution
- > 4 1/2-digit liquid crystal display
- > Digital readout of quantity system output in (volts, lbs., ratio, etc.)
- > Interchangeable aircraft interface modules
- > Powered from common AA batteries
- > Provisions for bench-testing of system components
- > State-of-the-art low battery drain circuitry
- > Maximum ease of operation and maintenance
- > Requires DC400 aircraft specific module

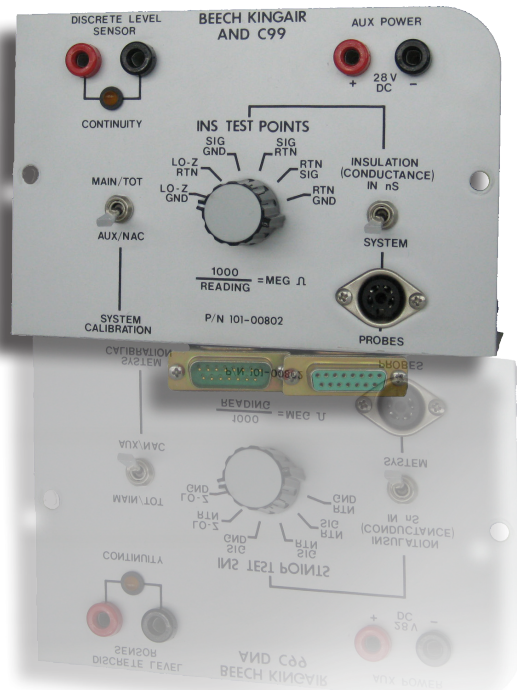

DC400A adapter modules

The interchangeable adapter modules customize the DC400A to interface directly with specific aircraft without the need for an external cable.

>> Aircraft specific modules include:

- BAe Jetstream 32
- BAe Jetstream 41
- Bell Helicopter 214ST
- Bell Helicopter 412SP, 412HP
- Canadair CL600, CL601
- Dehavilland DHC8
- Embraer EMB-120
- Hawker Beechcraft King Air C-99 & 1900
- Hawker Beechcraft 125-800
- Hawker Beechcraft 125-1000
- Piper Meridian
- SAAB SF-340
- Swearingen SJ30-2

DFQ40K Fuel quantity test set

- > Microprocessor based
- > Completely self contained AC capacitance fuel quantity test system
- > Measures capacitance, insulation, DC voltage, resistance and distance to fault
- > Capacitance simulation and indicator testing
- > Custom multi-line backlit graphic display
- > Direct keypad entry of Tank and Comp simulation values
- > Uses all existing fuel quantity cables
- > Uses new generation of Smart Cables to perform Automated Test Routines
- > Calibration date available from display with user alerts to approaching calibration date
- > Numerous user prompts
- > Powered from common C-cell batteries with auto-off feature to conserve energy



AC adapter cables

Contrary to popular belief, there is no mystery to troubleshooting and calibrating fuel capacitance systems, but only if you have the right equipment.

>> Aircraft modules available for aircraft using AC fuel systems include:

ATR	Hawker Beechcraft (C-90, A100) Beechjet
Airbus	Hawker-Siddeley
Bell Helicopter	IAI
Boeing	Learjet
Canadair	Lockheed
Casa	McDonnell-Douglas\Boeing
Cessna	Mitsubishi
Dehavilland	Nord
Embraer	Pilatus
Eurocopter/Aerospatiale/MBB	Piper
Fairchild	Rockwell
Falcon Jet	Sikorsky
Fokker	Socata
Gulfstream	Swearingen



Airbus Avionics & Simulation



G5-5M0-319-0000
Main Landing Gear Wheel
Tachometer Driving Tool

- > Control the rotation direction of the motors
- > Control the speed of the motors
- > Check the RPM of the motors
- > Unit is supplied with 28VDC and protected by a 5A fuse
- > Drive motor support drives landing gear tachometer generators means of drive shafts



G5-5M0-321-0000
Check Doors Tool

- > Adjustment of Eldec proximity detector for FAR and NEAR configurations
- > Check PETERCEM proximity detectors
- > Self dependent by means of 18VDC power supply
- > Check of cargo compartment doors locked position indicating section



28 VDC Power Supply Tool

- > Activate side stick solenoid to enable the adjustment of transducer unit input lever
- > Simulate auto pilot mode to check operation of spring rod in artificial feel unit
- > Models available for A319, A320, A321
- > Models available for A330, A340
- > Models available for A340-500-600

Aeroframe Airrepairs

Testers for GTCP85, GTCP331 & GTCP660 series APU's



AT600A (GTCP85 Series)

- > APU & ECU cable interface
- > Panel meter digital readout
- > Monitor aircraft signals
- > Fault simulations
- > Resistance measurements
- > Current measurements
- > GO/NO-GO indications
- > Self-test



AT300A (GTCP331 Series)

- > APU & ECU cable interface
- > Panel meter digital readout
- > Monitor aircraft signals
- > Electrical loading
- > Fault simulations
- > Resistance measurements
- > GO/NO-GO indications
- > Battery noise detection



AT100A (GTCP660 Series)

- > APU cable interface
- > Panel meter digital readout
- > Monitor aircraft signals
- > Fault simulations
- > Resistance measurements
- > Pressure measurements
- > GO/NO-GO indications
- > Self-test



TI120EL/TI130/TI200/210 TI213EL/TI315/TI315E Infrared Thermometer

- > Fast and reliable non-contact temperature measurement
- > Celsius\Fahrenheit selectable
- > Adjustable emissivity, backlight
- > Tolerance alarm
- > Display of Max., Min., T, Avg. and real time value
- > Display hold, wide application



TR200/210/220 Roughness Tester

- > Applicable in production site, laboratory and workshop in factory
- > Easy operation menu and large LCD display with backlight
- > Pickup position indicator
- > Li-ion rechargeable battery
- > Conform to ISO standard, compatible with DIN, ANSI and JIS standard



TT210 Coating Thickness Gauge

- > Two measuring methods: magnetic induction (F) and eddy current (N)
- > Automatic recognition of substrate
- > Automatic selection of measuring methods
- > Upper-lower limit setting & sound alarm
- > High speed data collection
- > 500 readings can be stored



TT700 Precision Ultrasonic Thickness Gauge

- > Especially suitable for testing the thin workpieces
- > I-E testing mode and E-E testing mode
- > Sound velocity testing and single point calibration
- > Sound alarm and differential mode are available
- > mm/inch are selectable
- > Data store, view and delete



PST-1160 Video Capture Endoscope

- > Resolution 640(H)x 480(V)
- > Tip diameter: 5.5mm/8mm
- > Frame rate: 20-30fps
- > Field of view: 67 degrees
- > Depth of field: 1.5cm-10cm
- > Recording/capture: 640 x 480jpg or 640 x 480avi according to PC
- > Video format: NTSC



PST-2486 Portable Video Borescope

- > Resolution 640(H)x 480(V)
- > Tip diameter: 3.9mm-up20mm
- > Frame rate: 30fps
- > Field of view: 67 degrees
- > Depth of field: 1.5cm-10cm/10cm - unlimited
- > Recording medium: 2GB SD card with supports up to 4GB 3D card

www.bartfieldinc.com

Barfield repair service

Tired of repairing analog instruments?



Digitize!

Upgrade your older 1811 series pitot-static testers to the Battery operated drop-in replacements for the current analog instruments.

Retrofit Includes: DALT55 (1 ea.), DAS650 (1ea.), rechargeable battery pack (1 ea.) and installation.

Save on repairs over the life of a digitized product



Digital retrofit service

- > Transducer technology (No more blown instruments)
- > Virtually immune to overpressure damage
- > One-button leak test feature
- > DAS650 displays Airspeed.
- > Mach displayed when coupled with the DALT55
- > DALT55 displays Altitude and VSI simultaneously
- > 1-year calibration cycle (OEM suggested cycle)
- > Rechargeable battery pack
- > Battery power level displayed on main screen
- > Backlit for nighttime operation
- > No correction cards needed

Why send your equipment to the OEM?

With the OEM you receive additional benefits and extras that other calibration shops are unable to provide such as:

- > Receive OEM designated free mods, including software updates
- > Dedicated repair shop and customer service team
- > Highest level of technical knowledge about the equipment
- > Advanced Cal/Bench Check; Standard System & Component Checks
- > Latest revision verification on users' operation manuals
- > Receive OEM warranty benefits
- > Outdated operation manuals replaced as needed



ELTA Model ADT406 Series

Cospas-Sarsat, FAA/ETSO Approved




ADT406 AF Automatic/Fixed

- > Automatic (G-Switch) activation
- > 3 position guarded switch (Off/Armed/On)
- > Visual & aural activation alerts
- > No scheduled maintenance - 5 years
- > Encodes all four ID protocols
- > Integrated to A/C antenna / cockpit panel

ADT406 S Survival/Portable

- > Manual or water activation (fresh or saltwater)
- > Stable flotation capability
- > 3 position guarded switch (Off/Armed/On)
- > Visual & aural activation alerts
- > No scheduled maintenance - 5 years
- > Encodes all four ID protocols



ADT406 AP Automatic/Portable

- > Automatic (G-Switch) or manual activation
- > Stable flotation capability
- > 3 position guarded switch (Off/Armed/On)
- > Visual & aural activation alerts
- > No scheduled maintenance - 5 years
- > Encodes all four ID protocols

Siemens

Smoke Detection

FAA/ETSO Approved




PPC1200-00

- > Communicates via discrete I/O or CAN bus
- > Significant false alert reduction
- > Built-in test
- > No preventive maintenance
- > Low weight and volume

GMC1102-02

- > Communicates via discrete I/O or CAN bus
- > Significant false alert reduction
- > High MTBF/MTBUR
- > Built-in test
- > No preventive maintenance
- > Low weight and volume

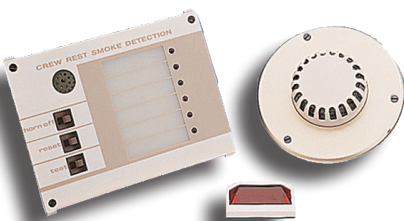

KTA2400

- > Standalone smoke detection system
- > Control panel + up to 6 smoke detectors
- > Full system test from control panel
- > Local and remote alarm
- > Visual & audible + 2 discrete outputs
- > Local alarm horn (90dB at 1 meter)



Seats and seat parts

Barfield is the exclusive distributor of EADS Sogerma seats and seat parts in the Americas. We are also the only OEM authorized warranty/repair station, with two shops conveniently located in Miami FL and Phoenix AZ.

>> Crew seats for:

Airbus
Fokker
Hawker Beech
Learjet

>> Cabin seats for:

Airbus
Boeing

Olaer



Olaer

Barfield is the exclusive distributor of Olaer products in the Americas. As the oldest manufacturer of hydraulic accumulators, Olaer provides a full range of bladder accumulators, Olaer provides a full range of bladder accumulators, and membrane accumulators. We are also the OEM authorized warranty/repair station in the Americas.

- > All LRU's and piece parts available
- > Adaptable high flow fluid ports
- > Wide pressure range
- > Adaptation low and high temperatures
- > Horizontal or vertical installation

Miscellaneous Distributed Items

Barfield is a distributor for over 50 product lines. Specializing in European manufacturers (OEMs) Barfield has the ability to keep you flying.

- > Distribution agreements for both LRU's and piece parts for several major OEM's
- > Piece part inventories for almost all aircraft types, including avionics, components, accessories and instruments
- > Experienced and dedicated sales staff with in-depth knowledge of each product line
- > Over 65 years dedicated to the aviation industry



Barfield, your authorized OEM distributor

With Barfield's experience in the aviation industry many relationships have been built that helps us become a centralized location to satisfy various customer needs. Our key partners include:

- > Airbus Avionics & Simulation Products
- > EADS Sogerma
- > Eldec
- > Elta
- > Litef
- > Olaer
- > Siemens



Barfield is part of the AFI KLM E&M Network



- Network Facilities
- Logistic Centers
- Sales Offices
- AFKL Major Stations



Miami
 4101 N.W. 29th Street
 Miami, FL, 33142
 Phone: +1 305 894 5300
 Fax: +1 305 894 5301

Louisville
 5590 Shepherdsville Road
 Louisville, KY, 40228-1012
 Phone: +1 502 962 9422
 Fax: +1 502 962 9722

Phoenix
 1912 West 4th Street
 Tempe, AZ, 85281
 Phone: +1 480 477 2000
 Fax: +1 480 477 1999

Barfield: + 1 305 894 54 00 / Discover our online capability list at www.barfieldinc.com
 Distribution: distribution@barfieldinc.com / Ground Support Test Equipment: gste@barfieldinc.com

